



# LIMITEX AG

## HAZARDOUS AREAS Rotary limit switch



Explosion proof rotary limit switch.  
Rugged and reliable, Limitex AG is used to control the movement of industrial machinery in potentially explosive areas.

### FEATURES

- It consists of a gear motor that transfers movement through a primary input reduction stage (worm gear and helical toothed gear) and one or more secondary output stages (pairs of straight toothed gears).
- Accurate adjustment of cams by means of screws.
- Positive opening NC contacts for safety functions.
- Mechanical life of switches: 1 million operations.
- IP protection degree: Limitex AG is classified IP66.
- Extreme temperature resistance: -40°C to +60°C.
- It features rugged external enclosure made of G20 cast iron, stainless steel transmission and gear driving shafts, self-lubricating technopolymer gears and driving bushes.
- All materials and components used are wear resistant and guarantee protection of the unit against water and dust.

### OPTIONS


- Revolution ratios from 1:15 to 1:499, achieved by combining different secondary output stages.
- Snap action switches with 1NO+1NC change-over contacts.
- It can be equipped with a cam set with 2-3-4 switches.
- Available with flange for direct coupling to the motor.
- Available with direct control switches to enable direct action on the motor.

### CERTIFICATIONS

- CE marking.
- Atex certification EN 60079-0:2009, EN 60079-1:2007, EN 60079-31:2009.
- Conformity to Standards IECEX IEC 60079-0:2011, IEC 60079-1:2007-04 and IEC 60079-31:2008.

*Fill in the request form to configure properly the product.*

## CERTIFICATIONS

<b>Conformity to Atex Standards</b>	EN 60079-0:2009 Explosive atmospheres - Equipment - General requirements
	EN 60079-1:2007 Explosive atmospheres - Equipment protection by flameproof enclosures "d"
	EN 60079-31:2009 Explosive atmospheres - Equipment dust ignition protection by enclosure "t"
<b>Conformity to IECEx Standards</b>	IEC 60079-0:2011 Explosive atmospheres - Equipment - General requirements
	IEC 60079-1:2007-04 Explosive atmospheres - Equipment protection by flameproof enclosures "d"
	IEC 60079-31:2008: Explosive atmospheres - Equipment dust ignition protection by enclosure "t"
<b>Atex Certification</b>	INERIS 13ATEX0020X
<b>IECEX Certification</b>	IECEX INE 13.0051X
<b>Certification for group I, IIA, IIB and IIC with the marks*</b>	MINING: I M2 Ex d I Mb (ATEX) Ex d I Mb (IECEX)
	GAS Zone 1 and 2: II2G Ex d IIB T6 Gb or Ex d IIC T6 Gb (ATEX) Ex d IIB T6 or Ex d IIC T6 Gb (IECEX)
	DUST Zone 21 and 22: II2D Ex tb IIIC T85°C Db IP66 (ATEX) Ex tb IIC T85°C Db IP66 (IECEX)
	GAS & DUST: II2GD Ex d IIB or IIC T6 Gb Ex tb IIC T85°C Db IP66
<b>Conformity to Community Directives</b>	2014/35/UE Low Voltage Directive
	2006/42/CE Machinery Directive
<b>Conformity to CE Standards</b>	EN 60204-1 Safety of machinery - Electrical equipment of machines
	EN 60204-32 Safety of machinery - Electrical equipment of machines - Requirements for hoisting machines
	EN 60947-1 Low-voltage switchgear and controlgear
	EN 60947-5-1 Low-voltage switchgear and controlgear - Control circuit devices and switching elements - Electromechanical control circuit devices
	EN 60529 Degrees of protection provided by enclosures
<b>Markings and homologations</b>	CE  IEC IECEX

## GENERAL SAFETY SPECIFICATIONS



<b>Maximum power supply</b>	300 Vac
<b>Maximum current intensity</b>	3 A
<b>Maximum dissipated power</b>	2 Watt
<b>Rated frequency</b>	50 / 60 Hz

## GENERAL TECHNICAL SPECIFICATIONS


<b>Operational ambient temperature</b>	-40°C/+60°C
<b>Protection degree</b>	IP 66
<b>Maximum rotation speed</b>	800 rev./min.
<b>Cable entry</b>	Nr. 2 M20x1,5
	Nr. 2 M25x1,5
	Nr. 2 ½ NPT

\* The user is responsible for choosing the proper limit switch protection type, group and maximum case temperature. The user is also responsible for the correct installation, connection to the electrical network and use and maintenance of the electrical devices.


## TECHNICAL SPECIFICATIONS OF THE MICROSWITCHES

Code	PRSL0003XX	PRSL0011XX
Utilisation category	AC 15	
Rated operational voltage	250 Vac	
Rated operational current	3 A	
Rated thermal current	10 A	
Rated insulation voltage	300 Vac	
Mechanical life	1x10 <sup>6</sup> operations	
Connections	6.3 mm Faston taps	Screw-type terminals
Wires	-	2x0.5mm <sup>2</sup> , 2x1.5 mm <sup>2</sup> , 1x2.5 mm <sup>2</sup>
Tightening torque	-	0.5 Nm
Microswitch type	Single break, snap action	
Contacts	1NO+1NC change-over contacts (All NC contacts are of the positive opening operation type  )	
Scheme		

## OVERALL DIMENSIONS (mm)

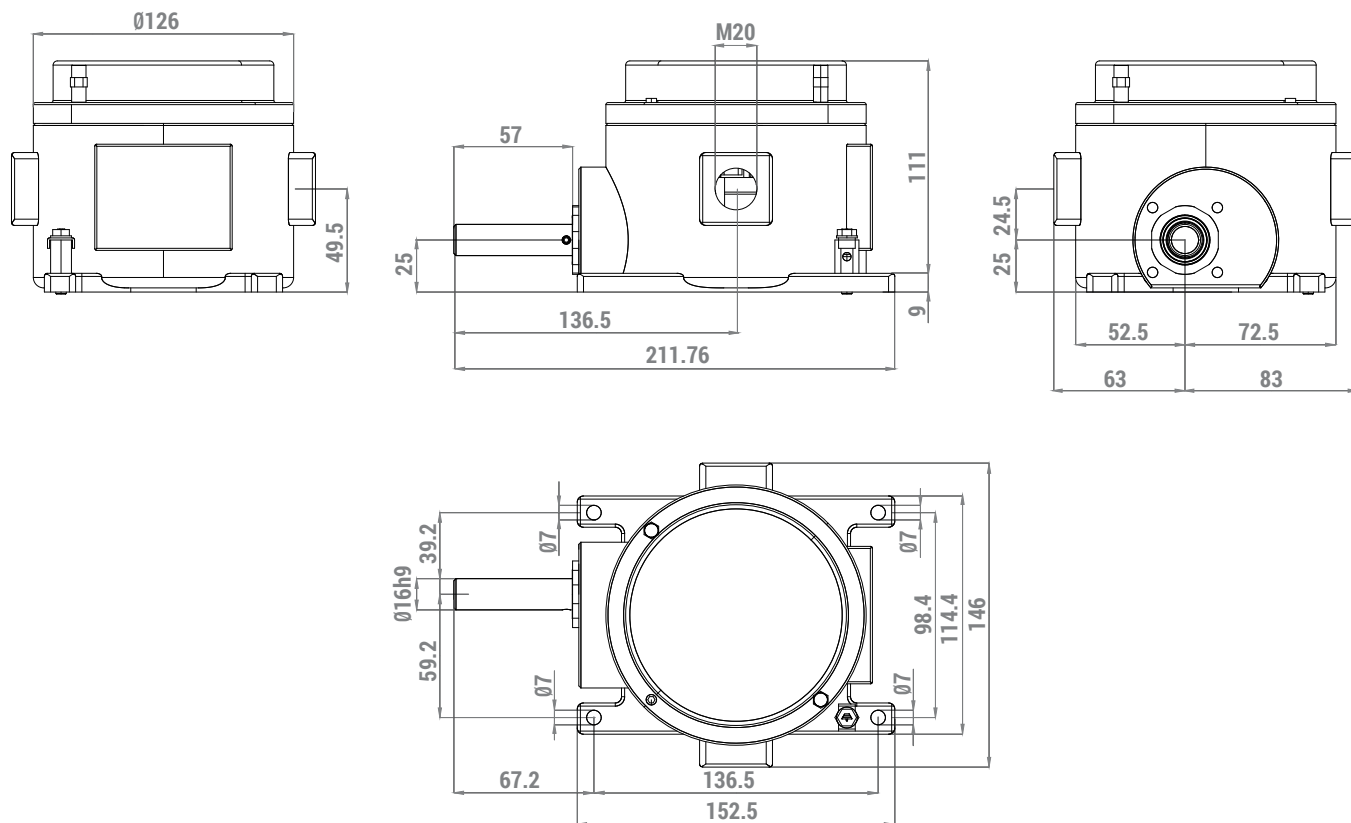


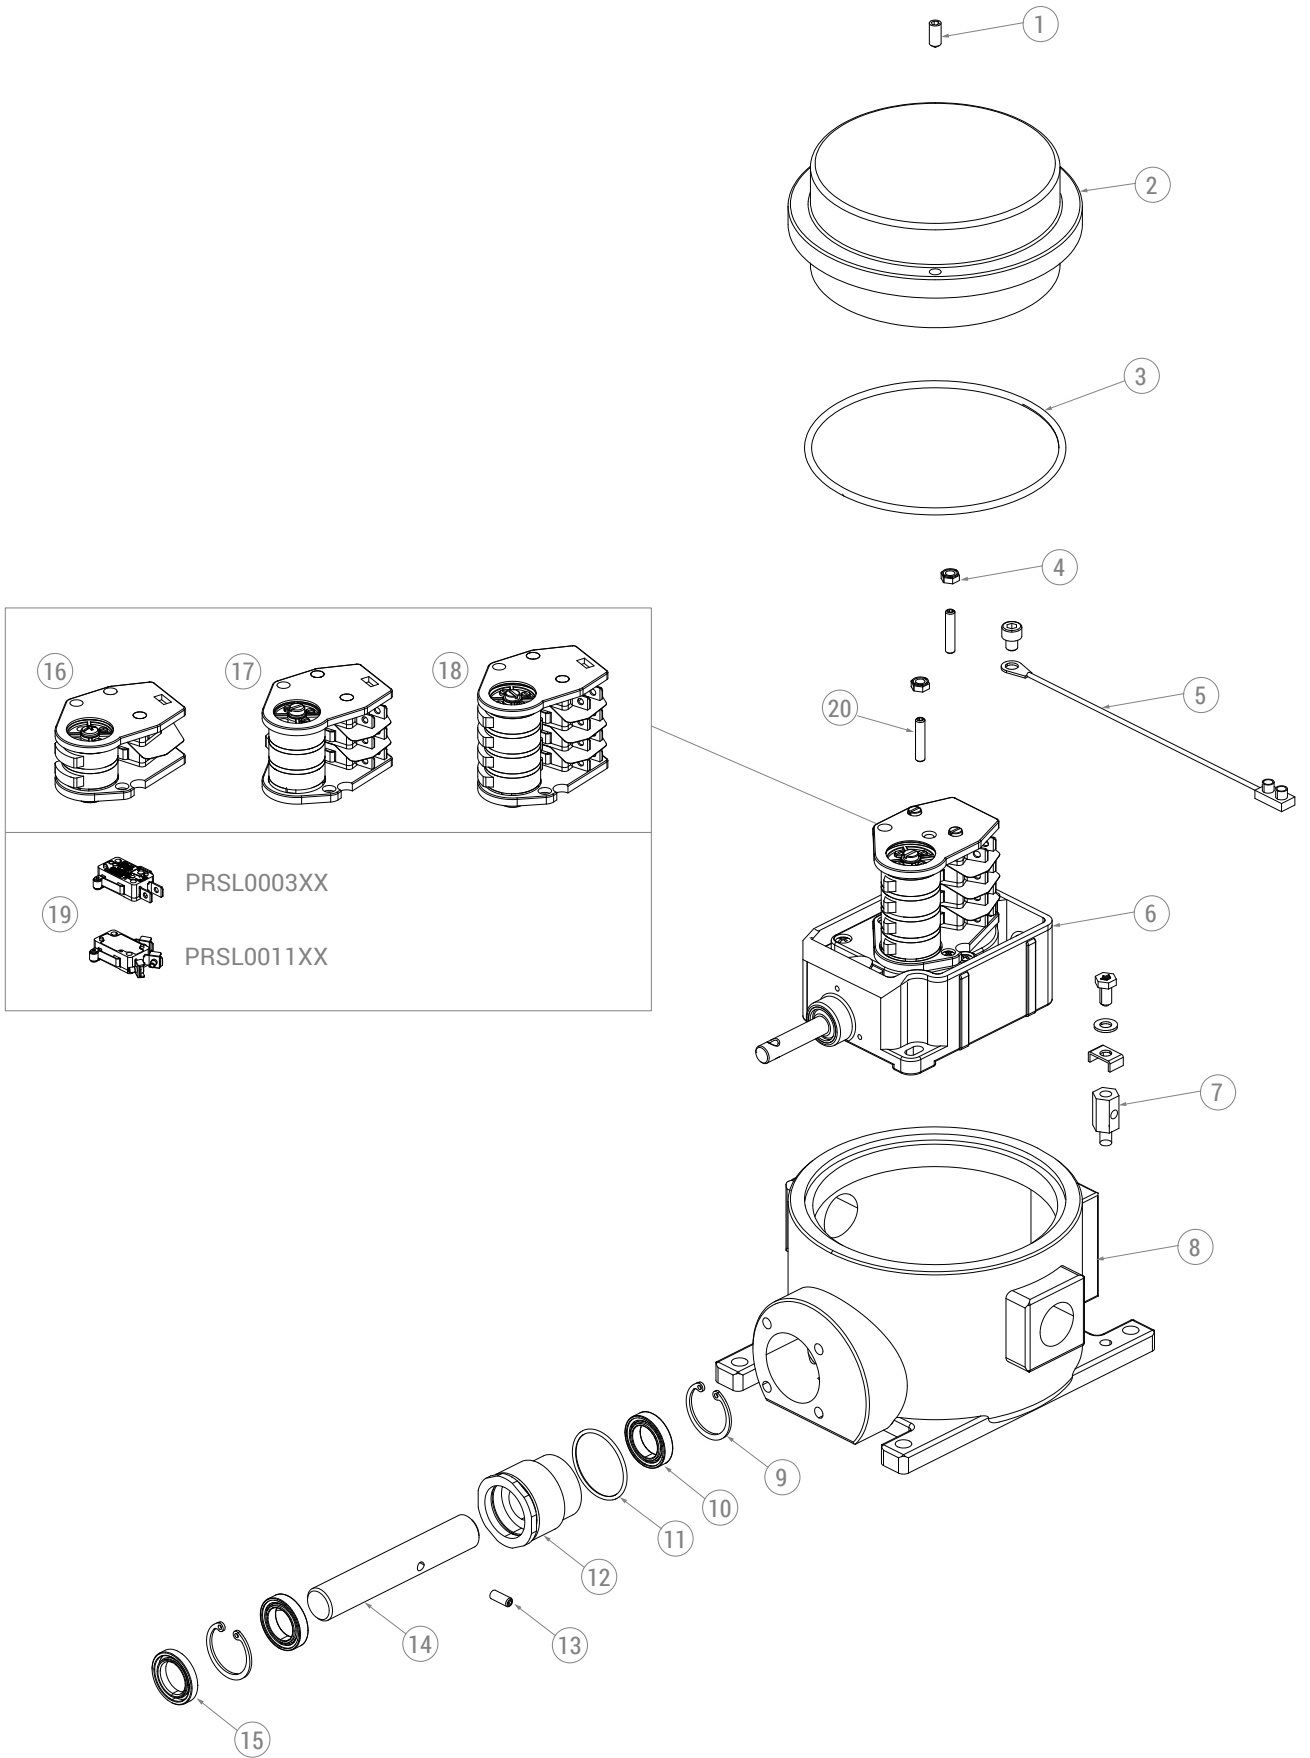

EXPLODED DRAWING








## COMPONENTS

### Standard cam sets

Ref.	Drawing	No. and type of cams	No. and type of switches	Code
16		2 cams A	2 PRSL0003XX switches	PRFC0008PEC
		2 cams C	2 PRSL0003XX switches	PRFC0009PEC
17		3 cams A	3 PRSL0003XX switches	PRFC0004PEC
		3 cams C	3 PRSL0003XX switches	PRFC0006PEC
18		4 cams A	4 PRSL0003XX switches	PRFC0202PEC
		4 cams C	4 PRSL0003XX switches	PRFC0198PEC

Other sets with 2/3 or 4 switches are available on request.

### Cam reference chart

Cam			Switching angle	Code
A		1 point	20.5° ±0.5°	PRSL7140PI
B		10 points	14.0° ±0.5°	PRSL7142PI
C		60° sector	78.0° ±0.5°	PRSL7141PI
E		180° sector	199.5° ±0.5°	PRSL7144PI
H		335° sector	344.0° ±0.5°	PRSL7143PI

